


RUN  
SEE LINK ON WEBSITE FOR  
VARIOUS WAYS CONTROL  
CAN BE USED

AIR FLOW SWITCH (FITTED)  
604X  
OVERHEAT CUT OUT  
(FITTED) OHCS

- NOTES :
- 1) (AUX) AUXILIARY 3 AMP SUPPLY @ 230V
  - 2) CABLE SIZE WILL DEPEND ON THE POWER OF THE HEATER
  - 3) OPTIONAL FAN SUPPLY (MAX 650W @ 230V)  
TEMPERATURE CONTROLLED AND COTINUOUS RUN WITH FAN RUN ON  
SEE LINK FOR CONTROL OF 3~ FAN
  - 4) SEE WEBSITE UNDER DOWNLOADS FOR HEATING &  
VENTILATION OPTION

CUSTOMER SUPPLY FROM  
LOCAL ISOLATOR

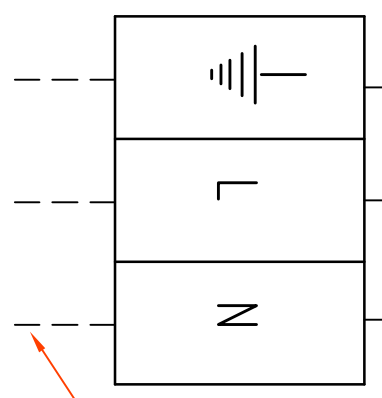

	ALL AROUND HEATING PRODUCTS LTD
WRING DRAWING FOR AAH/2 MAX 4.5kw 230V 1 PHASE	